

# ALTITUDE

**4 VERSIONS**

**5 LENGTHS**

**15 MODELS**

Decree 2004-924

**STANDARD NF EN 1004**

VERSIONS	LENGTHS				
	AL 135	AL 165	AL 205	AL 255	AL 300
STANDARD	✓	✓	✓	✓	✓
FOLDABLE BASE	✓	✓	-	-	-
ONE-PIECE GUARDRAIL	✓	✓	✓	✓	✓
MODULAR PLATFORM	✓	-	✓	-	✓

## AL 135

L. 1.40 M - . W.0,62 M

Usable area: 0.53 x 1.25 m

Load capacity per platform : 150 kg

## AL 165

L. 1.40 M - . W.0,62 M

Usable area: 0.53 x 1.50 m

Load capacity per platform : 157 kg



- Standard base or foldable base.
- Safe assembly and disassembly by one operator.
- Max. work height: 6,80 m.
- Aluminium/wooden platform with integrated aluminium toe-boards - 1 trapdoor.

- Ø 125 mm wheels, adjustable over 15 cm.
- Can fit through 0.73 m doors.
- Integrated difference-in-height set-up.

## AL 205

L. 2.05 M - . W.0,69 M

Usable area: 0.56 x 1.90 m

Load capacity per platform : 211 kg

## AL 255

L. 2.54 M - . W.0,69 M

Usable area: 0.56 x 2.39 m


Load capacity per platform : 265 kg

## AL 300

L. 2.95 M - . W.0,69 M

Usable area: 0.56 x 2.80 m

Load capacity per platform : 311 kg

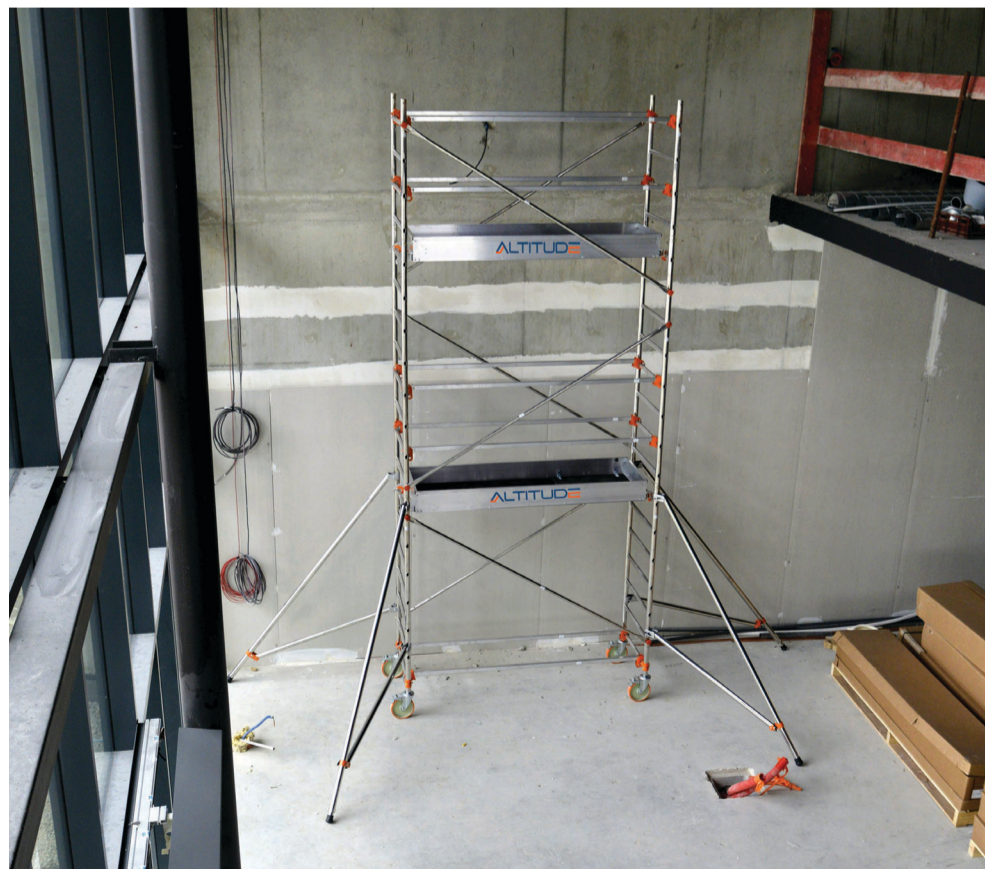

- Standard base.
- Safe assembly and disassembly by one operator.
- Max. work height: 9,90 m.

- Ø 125 mm wheels, adjustable over 15 cm.
- Can fit through 0.73 m doors.
- Integrated difference-in-height set-up.

MADE IN  
FRANCE